

Configurazione AIMID Magellan 3300

Per disabilitare la sigla identificatrice codifica stampare la pagina seguente, leggere -

- "START/END"
- "DISABLE AIM ID"
- "START/END"

AIM ID

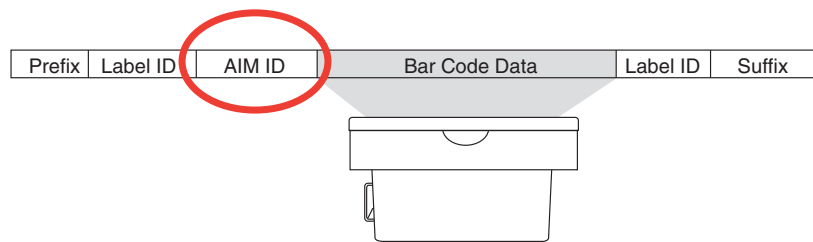
AIM (Automatic Identification Manufacturers) label identifiers are assigned from a globally standardized list — as opposed to custom label ID characters you select yourself — and can be included with scanned bar code data. AIM label identifiers consist of three characters as follows:



- A close brace character (ASCII '['), followed by...
- A code character (see the table below), followed by...
- A modifier character (the modifier character is symbol dependent)

SYMBOLGY	CHAR	SYMBOLGY	CHAR
UPC/EAN	E	Code 128/EAN 128	C
Code 39	A	GS1 Omnidirectional, GS1 Expanded	e
Codabar	F	Standard 2 of 5	S
Interleaved 2 of 5	I	ISBN	x ^a
Code 93	G		

^a ISBN (X with a 0 modifier character)

Figure 2. AIM ID



START / END	
PROGRAMMING bar codes	
	Disable AIM ID DEFAULT
Enable AIM ID	